

UAP Isolating Contactless Entry Slots


Door Security



Available in a 20-40 thickness for uPVC doors and 40-80mm thickness for wooden and composite doors

Enables homeowners to check a visitors ID and to pass small items such as shopping lists and prescriptions without physically opening the door

Available as part of the UAP Nanocoast range which comes with a LIFETIME coating guarantee!

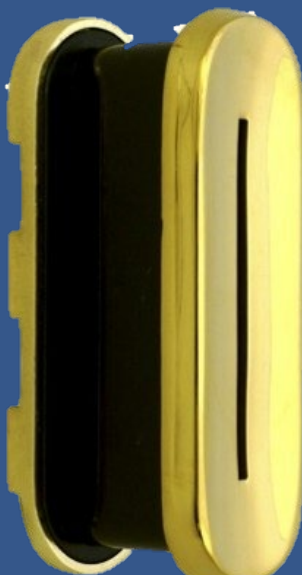

Protects those at-risk or those self-isolating

Ultimate protection against rogue traders and bogus callers

Acts as a visual deterrent to would-be criminals

30 minutes fire rated on timber and Nan Ya composite doors

Ideal for elderly and vulnerable people

What are contactless entry slots?

In these unprecedented times, UAP Isolating Contactless Entry Slots are helping protect those at-risk or those self-isolating at home by allowing an easy way to pass small items such as shopping lists and prescriptions from either side of the door without the need to open it and expose people on either side to the potential risk of COVID-19.

How do they work?

A homeowner simply lifts up the sliding latch of the slot from the inside to pass and receive items into their home contact-free, and puts the latch back down after use. Isolating Contactless Entry Slots also double as the ultimate security accessory for protection against rogue traders and bogus callers as they also allow the passing of ID cards or other materials so the home occupier can check the ID of a caller without having to open the door and have the caller standing in the doorway. This removes awkward fumbling that occurs when trying to pass ID through the letterbox and allows it to be thoroughly checked.

Benefits

The slots also act as a visual deterrent to would-be criminals, showing them that the home is aware of and prepared for bogus callers.

Zinc based Isolating Contactless Entry Slots (black, white, polished gold and polished chrome) are salt spray tested to ASTM B117 for 480 hours and comes with a five-year inland guarantee.



Product codes:

Finish	Door Thickness 20-40mm (uPVC Doors)	Door Thickness 40-80mm (Composite Doors)	Material Construction
PVD Gold	ICE2040PVDG-NANOCOAST	ICE4080PVDG-NANOCOAST	304 Grade Stainless Steel
Mirror Polished	ICE2040MPSS-NANOCOAST	ICE4080MPSS-NANOCOAST	304 Grade Stainless Steel
Polished Gold	–	ICE4080PVDG-SIGNATURE	Zinc
Polished Chrome	–	ICE4080CH-SIGNATURE	Zinc
White Powder Coat	–	ICE4080W-SIGNATURE	Zinc
Black Powder Coat	–	ICE4080B-SIGNATURE	Zinc

Dimensions:

Isolating Contactless Entry Length	38mm
Isolating Contactless Entry Width	128mm
Slot Length	80mm
Slot Width	3mm
Isolating Contactless Entry Plate (Front) Thickness	10mm
Isolating Contactless Entry Plate (Back) Thickness	9mm
Cavity (Hole) Size Needed	15mm(w) x 115mm (h)

