


# Heavy Duty All Stainless Steel 12 inch Fire Resistant Letterplate

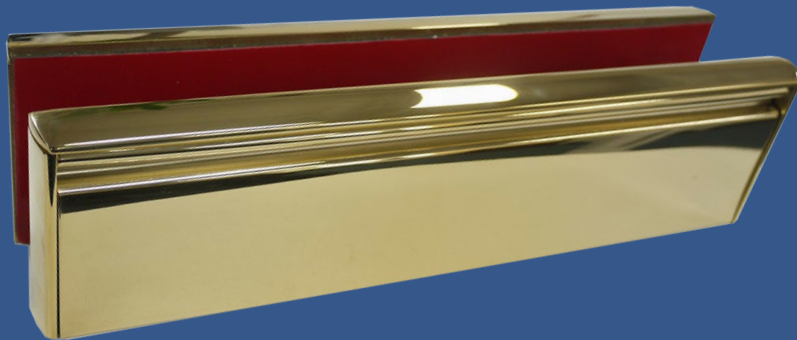

- Screw boss to guide screws in
- Stainless steel frame
- Sleeve designed for 40-80mm
- Smooth operating thumbturn to easily release the latch

## What is the Heavy Duty All Stainless Steel 12" Fire Resistant Letterplate?

These heavy duty all stainless steel letterplates are sturdier and heavier than any other UAP letterplate, offering a better quality product and making them more resistant. Made from 316 grade stainless steel, each product in the range has been salt spray tested to ASTM B117 for 2,000 hours, as the products will not pit, rust or corrode no matter what environments you put them in.

## The Heavy Duty All Stainless Steel 12" Fire Resistant Letterplate

PVD gold, mirror polished and satin stainless finishes are part of the Nanocoast range. These products are made from 316 grade stainless steel and are specifically designed for areas which are within a 25 mile radius of the coast, or within 5 miles of highly populated industrial areas. Unlike brass and zinc based products, the Nanocoast products will not pit, rust or corrode no matter what environments you put them in. This means that the products will last longer, and keep your customers happy. What's more, every Nanocoast product comes with a lifetime coating guarantee!



## Available in 3 finishes

Finishes	40-80 Door Opening	Material Construction	Coating Guarantee
Mirror polished	FMSS1248MPSS-HD-FR-NANOCOAST	316 Grade Stainless Steel	LIFETIME
PVD Gold	FMSS1248PVDG-HD-FR-NANOCOAST	316 Grade Stainless Steel	LIFETIME
Satin Stainless	FMSS1248SSS-HD-FR-NANOCOAST	316 Grade Stainless Steel	LIFETIME



### What else is included?

Outward-facing brushes which keeps vandals from placing unwanted objects through the opening, which makes posting easier and it makes the letterplate draught-excluding.

Blind bolts to the exterior of the letterplate prevents the outer frame being unscrewed from the door externally.

An internal water seal prevents water getting into the door or panel, and stops letters getting wet  
180 degree opening flap means the flap will not snap off when opened too far

Conforms to many standards and testing requirements including BS EN 1303:2005

Distance Between Screw Holes	272mm
Letterplate Length	300mm
Letterplate Height	74mm
Letterplate Width	40-80mm
Cavity Hole Size	257mm x 42mm

