

# UAP Screwfix Letterplate Restrictor Shrouds

## Door Security



Great protection against key fishing

Available as part of the UAP Nanocoast range which comes with a LIFETIME coating guarantee!

Prevents the letterplate inner flap opening more than 40 degrees

Prevents rods being pushed through the letterbox

14.5" long means it fits most letterplates

### Why Choose the UAP Hidden Fix Letterplate Restrictor Shrouds & Extensions?

Key fishing or letterplate fishing is a technique burglars use to get hold of your keys, purse, handbags and more without even having to enter a property!

They simply push open your letterbox flaps and use a long hooked rod, similar to a fishing rod, to 'fish' for your keys and handbags. Meaning they can then use the keys to just walk into your customer's property and help themselves to anything they want before driving off in their car!

### How does it Restrict?

The UAP screw fix letterplate restrictor Shroud will stop hands getting through your letterbox and either hooking your keys, or opening your lock. This simple but effective device is 14.5" long and stops the inner flap opening more than 40 degrees and so stops unwanted hands being able to manoeuvre a rod inside..

### Benefits


The PVD gold, mirror polished and satin stainless hidden fix letterplate shrouds are made from 316 grade stainless steel, and is part of the UAP Nanocoast range. The UAP Nanocoast range of products are specifically designed for areas which are within a 25 mile radius of the coast, or within 5 miles of highly populated industrial areas. The identity card slot have been salt spray tested to ASTM B117 for 2,000 hours, and comes with an industry first LIFETIME coating guarantee, as the products will not pit, rust or corrode no matter what environments you put them in!



## Product Codes:

Finish	Product Code	Material Construction
Gold Anodised	SHGA	Aluminium
Silver Anodised	SHSA	Aluminium
PVD Gold	SHPVDG-NANOCOAST	316 Grade Stainless Steel
Black	SHBL	Aluminium

## Technical Info:

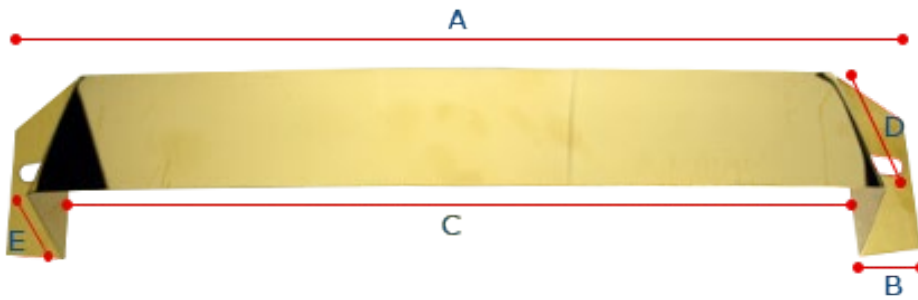

Overall Letterplate Shroud Length (A)	400mm
Flap Length (B)	30mm
Distance between inside edge of flaps (C)	340mm
Letterplate Shroud Width (D)	80mm
Protrusion from door (E)	40mm
Metal Thickness	1mm
Restriction Angle	40 Degrees
No. of Screw Needed	2
Screws Supplied	No