

Patio Door Lock



PAS24 tested and Secured
By Design approved

Available in 1414mm 6-hook or
1753mm 8-hook models

Tested to BSEN1670 Grade 5 for
480-hour corrosion resistance

10-year mechanical guarantee and
tested for 1,000 cycles

Compatible with all major uPVC
profiles

Designed for High-Security and Durability

Fullex patio door locks are designed for high security and long-term durability, making them a reliable choice for homeowners and businesses alike. Built to withstand heavy use, they come with a 10-year mechanical guarantee and have been rigorously tested for 100,000 cycles, ensuring long-lasting performance. Users can choose between two secure versions: the 1414mm 6-hook or the 1753mm 8-hook models, both offering advanced security features. For enhanced protection, these locks incorporate stainless steel opposing hooks, a central anti-lift bolt, and extendable top and bottom shootbolts, making it extremely difficult for intruders to force entry. Additionally, a mishandling device prevents accidental damage to the lock and keep, ensuring smooth operation over time. These locks are also versatile in fit, as they are compatible with all major PVCu profiles, making them suitable for a wide range of patio doors.

Made from austenitic stainless steel, these locks provide outstanding corrosion resistance, tested to BSEN1670 Grade 5 for up to 480 hours of rust protection. They smoothly integrate with UAP patio door handles for easy fitting and high-quality performance, featuring a 219mm backplate and adjustable handle direction. Combining superior security, durability, and convenience, Fullex patio door locks offer a reliable solution for securing patio doors with effortless operation.





Faceplate: 1414mm x 16mm

Product Code	Spindle	Backset Size	Handle Backplate	Handle Centres	No. of Hooks	Hook Direction	No. of Anti-Lift Bolts
FULLEX-PD1000	7mm	15.5mm	219mm	92mm	6	Opposing	1

Faceplate: 1753mm x 16mm

Product Code	Spindle	Backset Size	Handle Backplate	Handle Centres	No. of Hooks	Hook Direction	No. of Anti-Lift Bolts
FULLEX-PD2000	7mm	15.5mm	219mm	92mm	8	Opposing	1

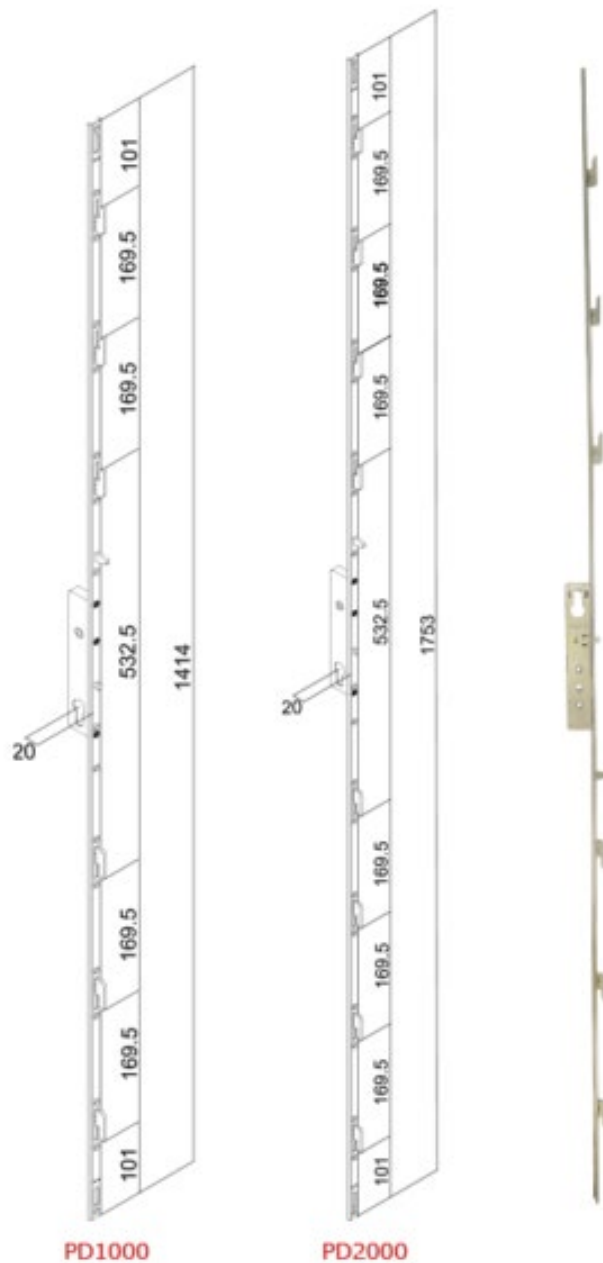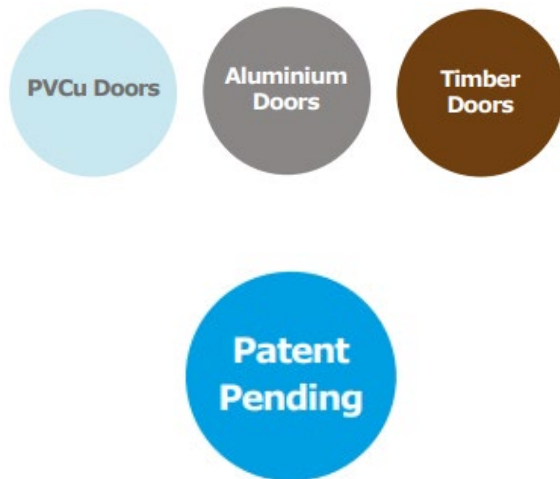

Technical Data:

Corrosion Resistance

BS EN1670 Grade 5 for 480 hours

Cycle Operation

Cycle tested to 50,000 operations

Materials:

Top and Bottom Hook

A3 Steel

Anti-lift Bolt

A3 Steel

8 Hook Patio Lock Faceplate

202 Stainless Steel

8 Hook Patio Gearbox

202 Stainless Steel

Interlock Faceplate

304 Stainless Steel

Interlock Gearbox

Mild Steel Zinc Plated